Columnas de **ACERO**

FLAP

STEEL Poles

FLAP

FABRICADA EN **ACERO GALVANIZADO Y TERMOLACADO**

Columna troncocónica, diseñada para conferir modernidad y sofisticación al espacio urbano

MADE OF **GALVANIZED AND THERMO-LACQUERED STEEL**

Truncated cone-shaped pole, designed to bring modernity and sophistication to urban spaces

FLAP

Columna troncocónica diseñada para conferir modernidad al espacio urbano.

FABRICADA EN ACERO GALVANIZADO Y LACADO AL HORNO

Fabricada en acero S-235-JR o superior, según norma UNE-EN 40-5. La fabricación se realiza en tramos de una sola pieza sin soldaduras transversales.

El galvanizado por inmersión en caliente le proporciona una alta resistencia contra la oxidación, la humedad, la corrosión o las atmósferas contaminantes.

Para darle una protección adicional se aplica una primera capa de Washprimer y una segunda capa de pintura de poliéster, ambas mediante procedimiento de termolacado (color bajo demanda)

Incorpora puerta de registro para el acceso a los elementos de derivación y terminal para puesta a tierra

BRAZO

Provista de brazo decorativo de sección cuadrada, con cartela embellecedora troquelada, todo fabricado en acero galvanizado y lacado al horno.

Acoplamiento horizontal de luminarias.

TORNILLERÍA en acero inoxidable.

ALTURA hasta 12m

ESCUDO HERÁLDICO

OPCIONAL: Escudo heráldico personalizado fabricado en acero inoxidable calidad AISI-316 acabado brillo, ubicado en la puerta de acceso a los elementos de derivación, conexión y puesta a tierra.

Dimensiones*

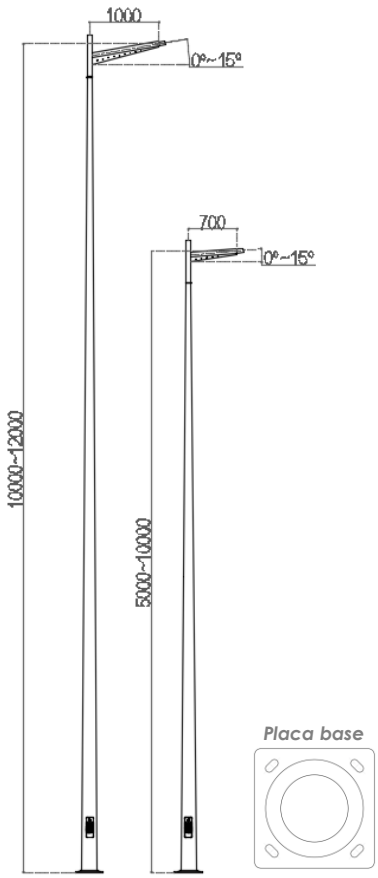

Muestra de algunas configuraciones

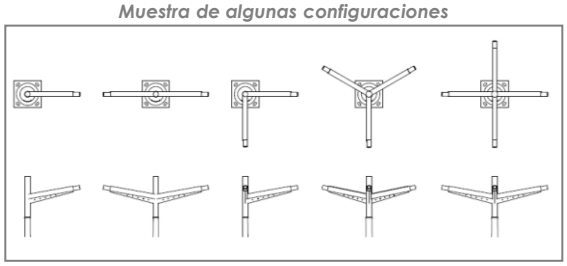

**Otras dimensiones y/o acabados: consultar*

IDELNOR se reserva el derecho de realizar modificaciones sin previo aviso. La información contenida en este documento es orientativa y no supone ningún compromiso contractual. Versión V250903_ESEN www.idelnor.es

FLAP

Truncated cone-shaped pole, designed to bring modernity and sophistication to urban spaces.

Made of GALVANIZED AND THERMO-LACQUERED STEEL

Manufactured in S-235-JR steel or higher, in accordance with standard UNE-EN 40-5. Manufactured in single-piece sections with no cross welds.

Hot-dip galvanized according to ISO 1461, providing high resistance to rust, humidity, corrosion, and polluted environments.

For added protection and an enhanced appearance, a dual-layer polyester paint finish is applied (first washprimer and then, polyester paint) oven-polymerized. (Colours available upon request)

Includes an access flushed door for easy access to bypass elements, connection and grounding.

BRACKETS

Fitted with a decorative square-section bracket with die-cut embellishment, all made of galvanized steel and oven-lacquered.

Horizontal fixing of luminaires.

STAINLESS STEEL SCREWS.

TOTAL HEIGHT: up to 12m

HERALDIC SHIELD

OPTIONAL: Customised heraldic shield made of AISI-316 quality stainless steel bright annealed finish, on the access flushed door.

Dimensions*

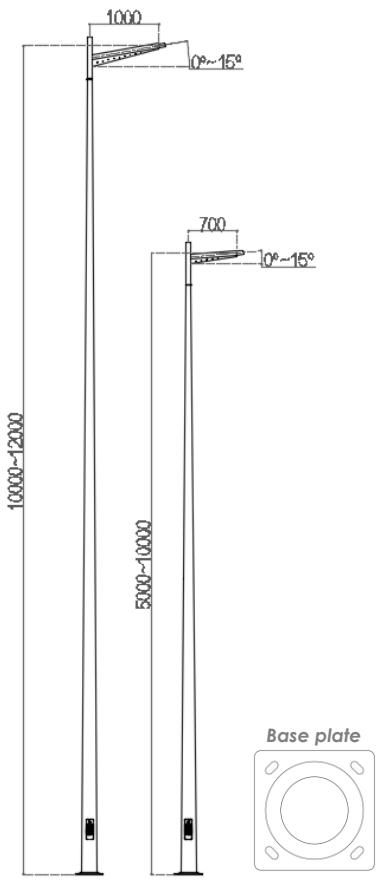

Sample of some configurations

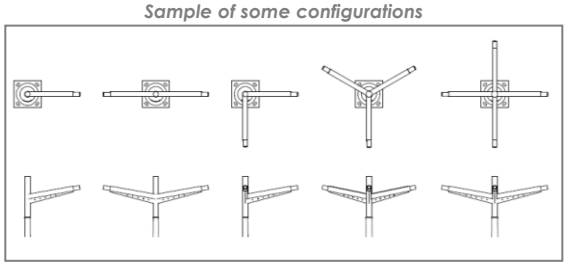

**Other dimensions and/or finishes: please, contact us*

IDELNOR reserves the right to make changes at any time without prior notice. The information contained in this document is only for guide and does not imply any contractual commitment.. V250903_ESEN. www.idelnor.es

Idelnor
www.idelnor.es